Rinnai®

CST119

HIGH VOLUME COMMERCIAL STORAGE TANK

VERTICAL, POTABLE HIGH VOLUME WATER STORAGE TANK FOR COMMERCIAL APPLICATIONS

Part Number	CST119
Capacity	119 Gallons (450 L)
Height	69.40 in. (1,763 mm)
Weight	385 lbs (175 kg)
Orientation	Vertical
Tank Openings	• Hot Water Outlet: 2 in. (51 mm) MNPT • Cold Water Inlet: 2 in. (51 mm) MNPT • Recovery/Supply Connection: 2 in. (51 mm) MNPT • Temperature and Pressure (T&P) Relief Port: 1 in. (25 mm) • Temperature and Pressure (T&P) Relief Valve not included • Thermistor Port: 3/4 in. (19 mm) FMNPT
Pressure	150 PSI Maximum
Warranty	6 Years

FEATURES

- Durable, energy-efficient 119-gallon (450 L) storage tank
- Glass fused to steel tank
- 2 in. (51 mm) uniform insulation
- Steel exterior with powder coat finish
- Four 2 in. (51 mm) MNPT connections - ideal for circulating-loop applications
- Factory-installed brass drain valve
- Two 1 in. (25 mm) magnesium anode rod locations for extra protection against corrosion
- 1 in. (25 mm) FNPT port for T&P (Temperature and Pressure Relief)

DIMENSIONS

TOP VIEW

Measurements: in. (mm)

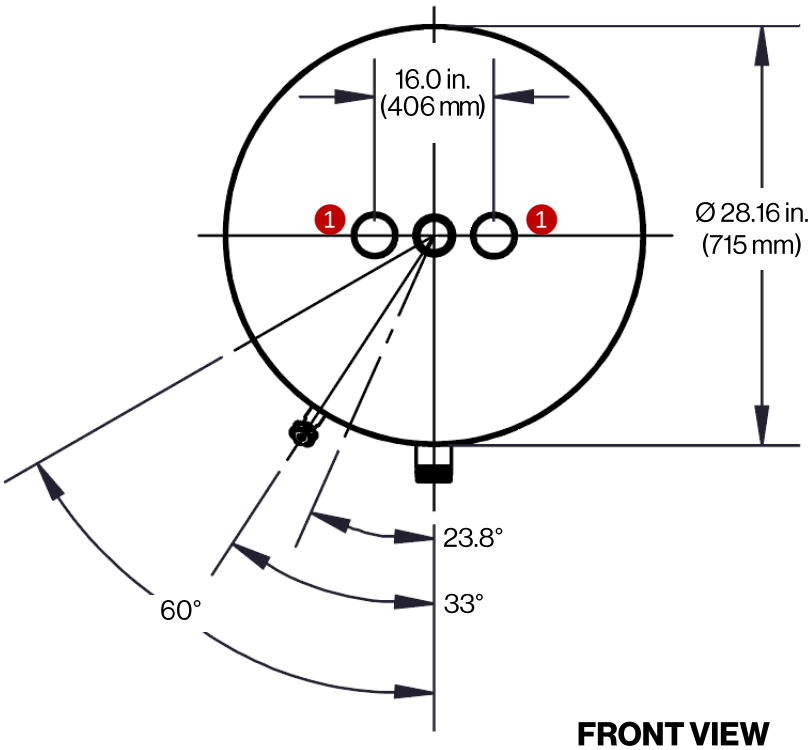

1. Two 1 in. (25 mm) Magnesium Anode Rod Locations

FRONT VIEW

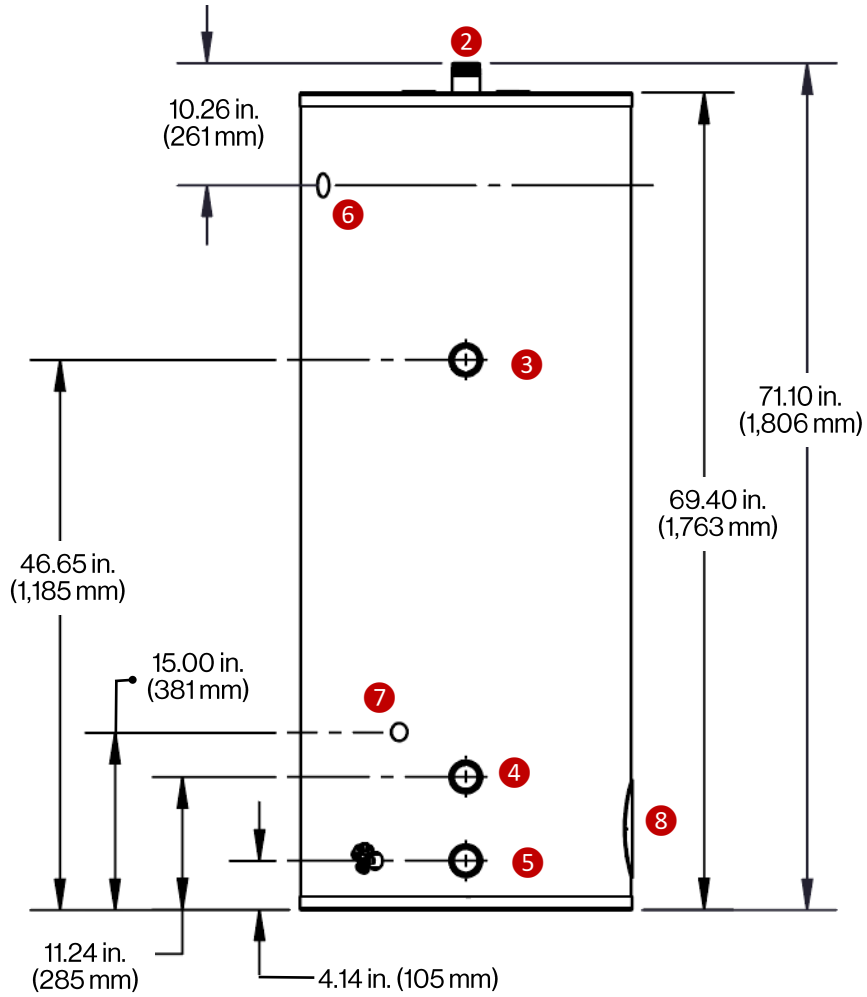

2. Hot Water Outlet
   2 in. (51 mm) MNPT
3. Hot Water Recovery Connection
   2 in. (51 mm) MNPT
4. Cold Water Recovery Connection
   2 in. (51 mm) MNPT
5. Cold Water Inlet
   2 in. (51 mm) MNPT
6. Port for Temperature and Pressure (T&P) Relief Valve 1 in. (25 mm) FNPT
7. Thermistor Port
   3/4 in. (19 mm) FNPT
8. Flanged Clean Out

©2026 Rinnai America Corporation. Rinnai America Corporation continually updates materials, and as such, content is subject to change without notice. Local, state, provincial, federal and national fuel gas codes must be adhered to prior to and upon installation.
100001152(01)
3/2026